


WTM-215W3-C/R/N

Features


- 21.5-inch Touch Monitor
- Pure flat and narrow bezel design
- Fanless aluminum alloy heat dissipation
- Capacitive touch, Resistive touch and Non-touch are optional
- Multi installation method optional
- Only front panel IP65 Waterproof
- With CE, RoHS, FCC and CCC certificates.

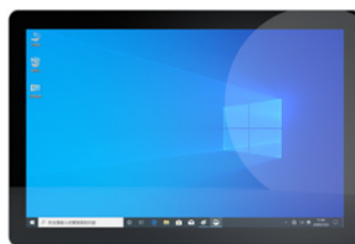

Specifications

Display and Touch Parameter	Size	21.5inch
	Display Area(mm)	476.50x268.00
	Resolution	1920x1080 (16:9)
	Color	16.7M
	Brightness	250cd/m2
	Viewing Angle (H/V°)	89° /89° /89° /89°
	Backlight	LED
	Life	50000hrs
	Touch Method	PCAP Projected 10 points capacitive touch for WTM-215W3-C Resistive touch single point for WTM-215W3-R Non-touch WTM-215W3-N
	Response Time	≤ 10ms
Interface	Surface Hardness	6H
	Light transmittance	≥ 85%
	OS Support	Windows XP, WIN 7, WIN 8, WIN 10, WIN 11, Android and Linux
	Interface	1*RS232 touch port, 1*DC, 1*VGA and 1*HDMI
General	Enclosure Material	Aluminum Alloy
	Heat Dissipation Method	Fanless Heat Dissipation
	Power Supply	DC12V / AC110V-240V,50-60 Hz
	Power Consumption	About 5W
	Dimension (mm)	535.7x326.7x53.02
	Cutout Size(mm)	518.7x315.2
	Working Temp.	0°C -50 °C
	Working Humidity	5%RH -95%RH

Dimension

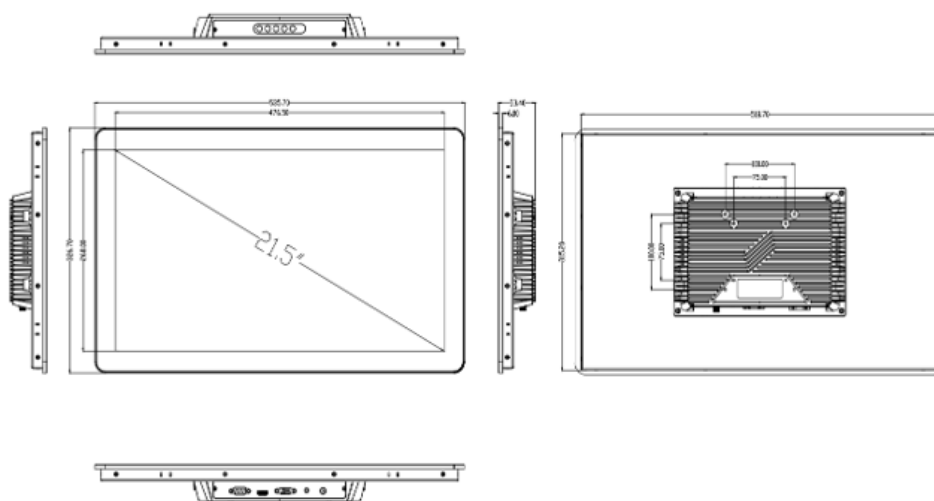

Ordering Information

Model name	Description
WTM-215W3-C	21.5-inch PCAP Projected Touch Monitor, 1920*1080, 16:9, Interface: RS232 touch port, HDMI and VGA *Only front panel IP65 Waterproof
WTM-215W3-R	21.5-inch Resistive touch single point Touch Monitor, 1920*1080, 16:9, Interface: RS232 touch port, HDMI and VGA *Only front panel IP65 Waterproof

Model name	Description
WTM-215W3-N	21.5-inch Non-Touch Monitor, 1920*1080, 16:9, Interface: RS232 touch port, HDMI and VGA *Only front panel IP65 Waterproof

*** Optional : Desktop Stand support 75x75mm and 100x100mm VESA Mount